

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
15 November 2001 (15.11.2001)

PCT

(10) International Publication Number  
**WO 01/86880 A2**

(51) International Patent Classification<sup>7</sup>: **H04L 12/28**,  
12/56, H04B 7/005

(21) International Application Number: **PCT/EP01/03950**

(22) International Filing Date: **6 April 2001 (06.04.2001)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:  
0010983.5 **5 May 2000 (05.05.2000)** **GB**

(71) Applicant (for all designated States except US): **NOKIA MOBILE PHONES LTD.** [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KANTOLA, Matti** [FI/FI]; Yliopistokatu 44A30B, FIN-90570 Oulu (FI). **KARKAS, Kalle** [FI/US]; 3863 Ingraham St. E 309, San Diego, CA 92109 (US). **PIIKIVI, Lauri** [FI/FI];

Rantakastellintie 14 D2, FIN-90230 Oulu (FI). **HUSS-MANN, Holger** [DE/DE]; Birkenkamp 55, 4770 Marl (DE). **NIEMI, Valtteri** [FI/FI]; Topeliuksenkatu 32 G11, FIN-00290 Helsinki (FI). **VAN VALKENBURG, Sander** [FI/FI]; Kalevalankatu 44 A12, FIN-00180 Helsinki (FI).


(74) Agents: **WILLIAMS, David, John et al.**; Page White & Farrer, 54 Doughty Street, London WC1N 2LS (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: **COMMUNICATION DEVICES AND METHOD OF COMMUNICATION**

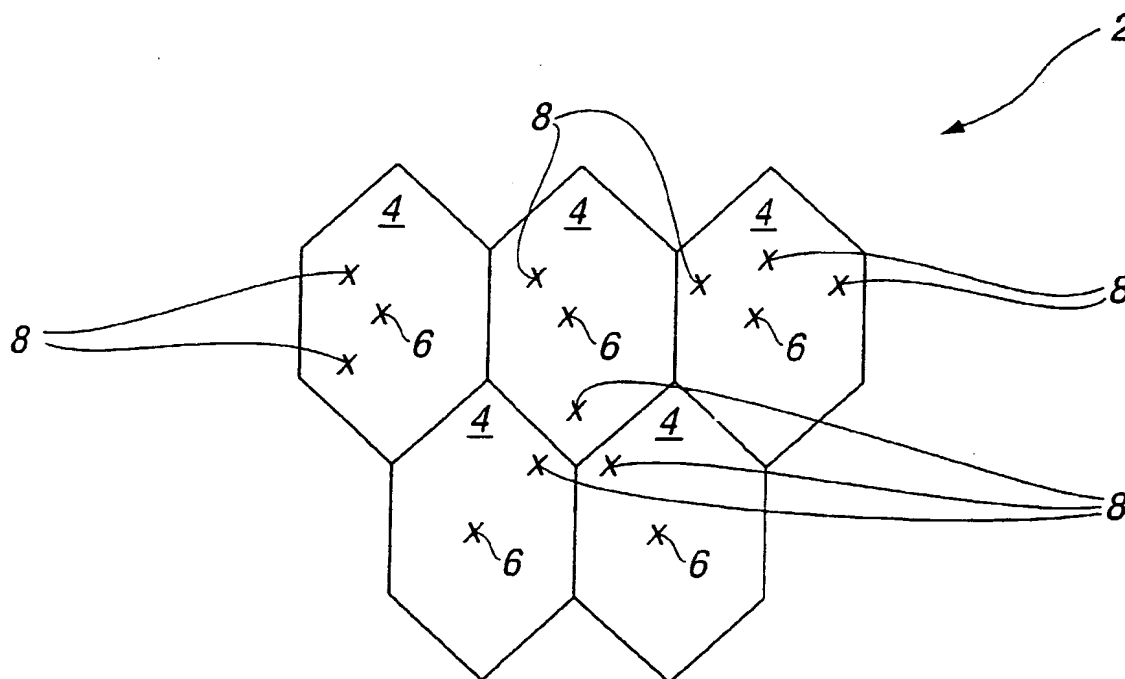

(57) Abstract: A communications device comprising means for transmitting a signal to another party; and means for controlling the signal level with which said transmitting means transmits, wherein said signal level is initially relatively low and when a connection is established with said another party, said signal level is increased.

BEST AVAILABLE COPY

WO 01/86880 A2



**Published:**

— without international search report and to be republished  
upon receipt of that report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## 5           **COMMUNICATION DEVICES AND METHOD OF COMMUNICATION**

### **Field of the Invention**

10       The present invention relates to communication devices and a method of communication. In particular, but not exclusively, the present invention relates to wireless communications devices and a method of wireless communications.

### **Background of the Invention**

15       It has been proposed to use mobile stations instead of credit cards at a point of sale. In this proposal, it has been suggested that a wireless link be established between the point of sale device and the mobile station. The mobile station may provide the point of sale device with similar information to that provided by a credit card.

20

One problem with this proposal is how to ensure that the correct mobile station is connected to the point of sale device. For example, in a busy supermarket, there may be a large number of point of sale devices and a large number of mobile stations. It is important that the right point of sale device be connected to the right mobile station. Clearly, considerable problems would be caused if the wrong mobile station were connected to the wrong point of sale device. The user of a mobile station could be charged for goods not purchased by the user.

25

### **Summary of the Invention**

30

It is an aim of embodiments of the present invention to address the above problems.

5 According to a first aspect of the present invention, there is provided a communications device comprising means for transmitting a signal to another party; and means for controlling the signal level with which said transmitting means transmits, wherein said signal level is initially relatively low and when a connection is established with said another party, said signal level is increased.

10

The control means may be arranged to control the power of the signal. The control means may be arranged to control the signal level of the transmitted signal to be one of only two levels, the initially low level and the increased level. Alternatively, the signal level may be initially at a starting level and be increased at a relatively low level. The starting point may be no signal. The signal level may be increased until a connection is established with said another party. The signal level may have a maximum value to which it can be increased when no connection has been established with the another party. The maximum value may be less than the signal level used when a connection with another party has been established.

20

According to a second aspect of the present invention, there is provided a communications device comprising means for receiving a signal from another party; and means for controlling the signal level with which said signal is received, wherein said signal level is initially relatively low and when a connection is established with said another party, said signal level is increased.

25

According to a third aspect of the present invention, there is provided a communications method comprising the steps of transmitting initially a signal to another party at a relatively low signal level; establishing a connection with the another party; and increasing the signal level with which signals are transmitted to said another party after said connection has been established.

30

- 5 According to a fourth aspect of the present invention, there is provided a communications method comprising the steps of receiving a signal from another party; attenuating said received signal by a first amount; establishing a connection with the another party; decreasing or removing the attenuation applied to said received signals when a connection has been established.

10

### Brief Description of Drawings

- For a better understanding of the present invention and as to how the same may be carried into effect, reference will now be made by way of example only to the  
15 accompanying drawings in which:-

Figure 1 shows a typical cellular telecommunications network;

Figure 2 shows a block diagram of an embodiment of the present invention;

Figure 3 shows the structure of the mobile station of Figure 2;

- 20 Figure 4 shows a service access point with attenuation of the received and transmitted signals;

Figure 5 shows a service access point with attenuation of the transmitted signals only; and

- 25 Figure 6 shows a service access point with attenuation of the received signals only.

### Detailed Description of Embodiments of the Invention

- 30 Reference is made to Figure 1 which shows a typical cellular telecommunications network. The area covered by the network 2 is divided into a plurality of cells 4. Each cell 4 is served by a base transceiver station 6. Each base transceiver station 6 is arranged to communicate with mobile stations 8 in the cell associated with that base transceiver station 6.

5 The cellular network 2 can use any suitable method of communication. Known methods of communication include those based on time division multiple access, frequency division multiple access and spread spectrum techniques such as code division multiple access. Hybrids of two or more of these access techniques can also be used. In the following description, the mobile station is described as  
10 operating in accordance with the UMTS (Universal Mobile Telephone System) standard, which uses code division multiple access. However, the mobile station can operate in accordance with any other suitable standard, for example GSM (Global System for Mobile Communications). GSM uses a time/frequency division multiple access technique.

15

Reference will now be made to Figure 2 which shows a block diagram of an embodiment of the present invention. Shown in Figure 2 is a service access point 10. The service access point, as will be discussed in more detail later, may be a point of sale device, a ticket gate, an information kiosk, ATM or any other suitable  
20 service access point.


25

The service access point 10 has an antenna 12. The antenna 12 is arranged to receive signals from a mobile station. The received signals are passed to an adjustable attenuator 13. The function of the attenuator 13 will be described in  
25 more detail hereinafter. The output of the attenuator 13 is connected to a wireless link 14. The wireless link 14 processes the received signals and puts the received data into a format which can be used by the main part 16 of the service access point. The wireless link may convert the received signal to a base band frequency and may carry out decoding and demodulation, as is well known.

30

The antenna 12 is also arranged to transmit signals to a mobile station. The wireless link 14 receives the data to be transmitted and puts it into a format suitable for transmission. The wireless link 14 may up convert the signals, encode and modulate the data before passing it to the adjustable attenuator 13. The

- 5 signals are attenuated, if necessary by the attenuator 13 before being passed to the antenna 12 for transmission.

Figure 2 illustrates how embodiments of the invention are able to overcome the difficulties described earlier. In the arrangement shown in Figure 2, four mobile  
10 stations 8a-d are provided. Each of these four mobile stations is reasonably close to the service access point. In the embodiment of the invention, it is desired to establish a connection between the first mobile station 8a and the service access point. It is extremely disadvantageous if, by mistake, a connection were to be established with any of the other three mobile stations 8b to 8d. 

15

The service access point 10 is able to adjust, using the adjustable attenuator 13, the power with which the antenna 12 transmits. The service access point is arranged, in preferred embodiments of the present invention to receive and transmit signals in accordance with the Bluetooth standard. The Bluetooth  
20 standard uses low power and high frequency signals (of the order of Giga Hertz).

If the Bluetooth signal were transmitted with its normal range of power, all of the four mobile stations 8a-d would be able to receive the Bluetooth signal from the service access point and accordingly a connection could be set up with any of the  
25 four mobile stations. To avoid this, the attenuator 13 is controlled so as to transmit initially with a very low power. This power is low enough such that the range of the signal is very small. For example, the signal may have a range of the order of a few centimetres, perhaps 10 or so centimetres. However this is an implementation issue and the initial range of the signals can have any suitable  
30 value.

This low level of power is maintained until a mobile station is within the short range of the service access point 10. A Bluetooth connection is then established between the mobile station and the service access point. Once the connection

- 5 has been established, the attenuator 13 is controlled to increase the power of the signal transmitted by the antenna to more usual levels. Typically, the signal will then be strong enough to be received by the all of the four mobile stations. However as a connection has already been established with the correct mobile station, no further connection is established with any of the other mobile stations.
- 10 Once a connection has been established, the communication link can optionally be encrypted if desired.

The attenuator 13 may have no attenuation effect on the signal to be transmitted once the connection with the correct mobile station has been established. The

15 attenuator may simply have two modes. In the initial mode, the signal to be transmitted is attenuated by a fixed amount so that the signal has only the very short range A. In the second mode, the attenuator provides no attenuation and the signals have a longer range B. When a connection has been broken, the attenuator reverts to the initial mode.

20

In an alternative embodiment of the present invention, the initially transmitted signals may have the smallest range. If a connection is not established when the service access point is transmitting with the lowest power, the power may be increased by the attenuator until a connection is established. The increase in

25 power may be gradual or stepwise. The power may be gradually increased from nothing. The attenuator may be controlled so that the signals are transmitted with up to a maximum power when no connection has been established. The maximum power may be the same as the power used when a connection has been established. However in preferred embodiments of the present invention,

30 the maximum power is less than the power used when a connection has been established.

In preferred embodiments of the present invention, the attenuator has no effect on the received signals, only on the signals to be transmitted. However in



- 5 alternative embodiments of the present invention the attenuator may attenuate the received signals some or all of the time.

The structure of the mobile station 8 is shown in Figure 3. The mobile station 8 has a first antenna 20 and a second antenna 22. The first antenna 20 is  
10 connected to a UMTS transceiver 24. The UMTS transceiver 24 is arranged to receive signals from the antenna 20 at a UMTS frequency. The UMTS transceiver 24 decodes the signals, demodulates them and also reduces them to the base band frequency. The output of the UMTS transceiver 24 thus consists of a stream of data. That stream of data may require further processing by the processor 26.

15 The UMTS transceiver also receives data from the processor 26 which is to be transmitted by the mobile station. The UMTS transceiver 24 encodes, modulates and up converts the signal to the radio frequency which is to be used. The radio frequency signal is then transmitted by the antenna 20.

20 The second antenna 22 is connected to a Bluetooth transceiver. Bluetooth is a proposed new standard that uses relatively low power radio frequency signals. The frequency may be in the GHz range. This is quite different to the UMTS frequencies. For this reason, separate antennas 20 and 22 are usually provided  
25 for the two different types of signal. The Bluetooth transceiver 28 receives Bluetooth frequency signals from the second antenna 22 and decodes, demodulates and down converts those signals. The data output by the Bluetooth transceiver 28 is input to the processor 26. The processor 26 is also arranged to provide data to the Bluetooth transceiver 28 which is to be transmitted by the  
30 Bluetooth antenna 22. This data is up converted to the Bluetooth frequency, modulated and encoded before being transmitted by the second antenna 22.

The mobile station 8 also has a display 30. The display is controlled by the processor 26 and provides information for the user. A keypad 32 is provided to

- 5 allow the user to input numbers and other information. The information input via the keypad 32 is input to the processor 26 which may be controlled in accordance with the input information. The mobile station has a speaker 34. This is controlled by the processor 26 and outputs audio signals which can be heard by the user. A microphone 36 is provided to pick up the user's voice. The microphone signals  
10 are input to the processor 26 which converts the signals into a format suitable for output to the UMTS transceiver 24.

Reference will now be made to Figures 4, 5 and 6. In Figure 4, the service access point 10a is arranged to attenuate signals that are both received and transmitted  
15 by the antenna 13a. The signals to be transmitted are input to a duplex filter 50. The transmit signals are output by a wireless link, as shown in Figure 2 to the duplex filter 50. The signals to be transmitted are attenuated by the attenuator 13a as described in relation to Figure 2 before being transmitted by the antenna  
20 12.

20

The signals, which are received by the antenna 12, are also input to the attenuator 13a which attenuates them. This means that signals from mobile stations further away from the service access point are not output from the attenuator or have a very low power. The attenuator 13a can be controlled to  
25 attenuate the received signals in a similar way to that described in relation to the transmitted signals. The attenuation of received signals may therefore be greater when the connection is being established and less when the connection has been established.



- 30 Reference is made to Figure 5 which shows for comparative purposes part of the arrangement of Figure 2. The service access point 10b is arranged to attenuate only the transmitted signals. The signals to be transmitted are attenuated by the attenuator 13b after the wireless link circuitry and before the signals are input to the duplex filter 50.

5

Reference is made to Figure 6 which shows a service access point 10c where only the received signals are attenuated. The attenuator 13c is arranged to received signals received by the antenna 12 via the duplex filter 50. The attenuator attenuates the signals which are received before they are processed  
10 further. The attenuator may be controlled in a similar manner to the attenuator described in relation to Figure 2. When a connection is established the received signals are attenuated to remove the signals other than from a very close mobile station. The attenuation may be removed or reduced once a connection has been established,

15

The preferred embodiments of the present invention have been described as using a Bluetooth link. However, it should be appreciated that any other suitable radio frequency can be used. For example, infrared frequencies may be used. Preferred embodiments of the present invention use a short range connection  
20 between the mobile station and the service access point. However, this may not be required in certain embodiments of the present invention.

25

Embodiments of the present invention have a number of different applications. In one embodiment, the mobile station is used to make a transaction a point of sale or similar device and effectively acts as a credit card, a debit card or an electronic  
purse. Credit card information for money transfer is provided to the point of sale or similar device using the Bluetooth connection link which is established between the service access point and the mobile station. For example once the link has been established, the mobile station provides the point of sale device with credit  
30 card details of the user and authorisation for the transaction. Other information such as the identity of the user may also be provided.

Embodiments of the present invention can for example be used at ticket gates. The mobile station includes a ticket to go to a film, concert, sports match or the

5     like. The Bluetooth connection is established between the mobile station and the ticket gate using the identification information. The confirmation of the ticket details is then provided to the ticket gate from the mobile station via the Bluetooth link.

10    Embodiments of the invention can be used to obtain information from an information station. The link is established and the information is exchanged using the Bluetooth connection. For example, the user can obtain train times etc from the information kiosk.

15    In an alternative embodiment of the present invention, the mobile station can be used to communicate with an automatic teller machine ATM to complete financial operations such as the loading of cash to an electronic purse, the withdrawal of cash or the like. The secure communication link between the station and the ATM is established with the ATM as discussed hereinbefore.

20

In some embodiments of the present invention, the mobile station may be arranged to act solely as a credit card or the like. In that case the UMTS circuitry can be omitted. The mobile station may thus include only the Bluetooth related circuitry. The display, keypad, speaker and/or microphone may therefore be  
25    omitted.

25

The described embodiments of the present invention have used a technique for establishing a connection between a service access point and a mobile station. It should be appreciated that embodiments of the present invention can be used to  
30    establish communication between any two or more communication devices. For example, embodiments of the present invention can be used to establish a connection between two or more mobile stations.

- 5 In preferred embodiments of the present invention, the mobile station may be replaced by any suitable communication device. Likewise the service access point can be replaced by any suitable communication device. In some embodiments of the present invention the communication capabilities of the communication device and/or the service access point may be very limited. In  
10 alternative embodiments of the present invention, the communication capabilities of the communication device and/or the service access point may be more extensive.

- 15 In some embodiments of the present invention, the antenna of the service access point may be omni directional. In other embodiments of the present invention, the antenna may be directional.

- 20 The normal range of the antenna of the service access point may be of the order of 10 meters. However this is an implementation issue and the normal range may be any suitable value.

## 5 CLAIMS

1. A communications device comprising:  
means for transmitting a signal to another party; and  
means for controlling the signal level with which said transmitting means  
10 transmits, wherein said signal level is initially relatively low and when a connection  
is established with said another party, said signal level is increased.
2. A communications device as claimed in claim 1, wherein said control  
means is arranged to control the power of said signal.
- 15 3. A communications device as claimed in claim 1 or 2, wherein said control  
means is arranged to control the signal level of the transmitted signal to be one of  
only two levels, the initially relatively low level and the increased level.
- 20 4. A communications device as claimed in claim 1 or 2, wherein said signal  
level is initially at a starting level and is increased to the relatively low level.
5. A communications device as claimed in claim , wherein said starting point  
is no signal.
- 25 6. A communications device as claimed in claim 1, 2, 4 or 5, wherein said  
signal level is increased until a connection is established with said another party.
7. A communications device as claimed in claim 6, wherein said signal level  
30 has a maximum value to which it can be increased when no connection has been  
established with said another party.

5 8. A communications device as claimed in claim 7, wherein said maximum value is less than the signal level used when a connection with the another party has been established.

9. A communications device comprising:

10 means for receiving a signal from another party; and  
means for controlling the signal level with which said signal is received, wherein said signal level is initially relatively low and when a connection is established with said another party, said signal level is increased.

15 10. A communications device as claimed in claim 9, wherein said control means is arranged to attenuate the signal level of the received signal by a first amount or a second amount only to provide the initially relatively low level and the increased level.

20 11. A communications device as claimed in claim 9, wherein said signal is arranged to be attenuated by a starting amount and the attenuation is reduced to provide signals at the relatively low level.

25 12. A communications device as claimed in claim 11, wherein said starting point is maximum attenuation.

13. A communications device as claimed in claim 9, 11 or 12, wherein attenuation of the received signal level is decreased until a connection is established with said another party.

30

14. A communications device as claimed in claim 13, wherein said attenuation has a minimum value to which it can be decreased when no connection has been established with said another party.

- 5 15. A communications device as claimed in claim 14, wherein said minimum value is greater than the attenuation used when a connection with the another party has been established.
- 10 16. A communications device as claimed in any of claims 9 to 15, wherein no attenuation is applied to the received signals when a connection has been established.
- 15 17. A communications device as claimed in any preceding claim, wherein said control means comprises an attenuator.
18. A communications device as claimed in any preceding claim, wherein when a plurality of another parties are provided, said communications device is arranged to establish a connection with the closest another party.
- 20 19. A communications device as claimed in any preceding claim, wherein said communications device is one of the following devices:  
point of sale device; ticket gate device; and information kiosk; ATM.
- 25 20. A communications device as claimed in any preceding claim, wherein said connection with said another party is a wireless connection.
21. A communications device as claimed in claim 20, wherein said wireless connection is a high frequency connection.
- 30 22. A communications device as claimed in claim 21, wherein said high frequency connection is of the order of giga Hertz.
23. A communications device as claimed in claim 22, wherein said wireless connection is a Bluetooth link.



5

24. A communications device as claimed in claim 20, wherein the wireless connection is an infrared connection.

10



25. A communications device as claimed in any preceding claim, wherein said another party is a mobile telephone.

15

26. A communications method comprising the steps of:  
transmitting initially a signal to another party at a relatively low signal level;  
establishing a connection with the another party; and  
increasing the signal level with which signals are transmitted to said another party after said connection has been established.

20

27. A communications method comprising the steps of:  
receiving a signal from another party;  
attenuating said received signal by a first amount;  
establishing a connection with the another party;  
decreasing or removing the attenuation applied to said received signals when a connection has been established.

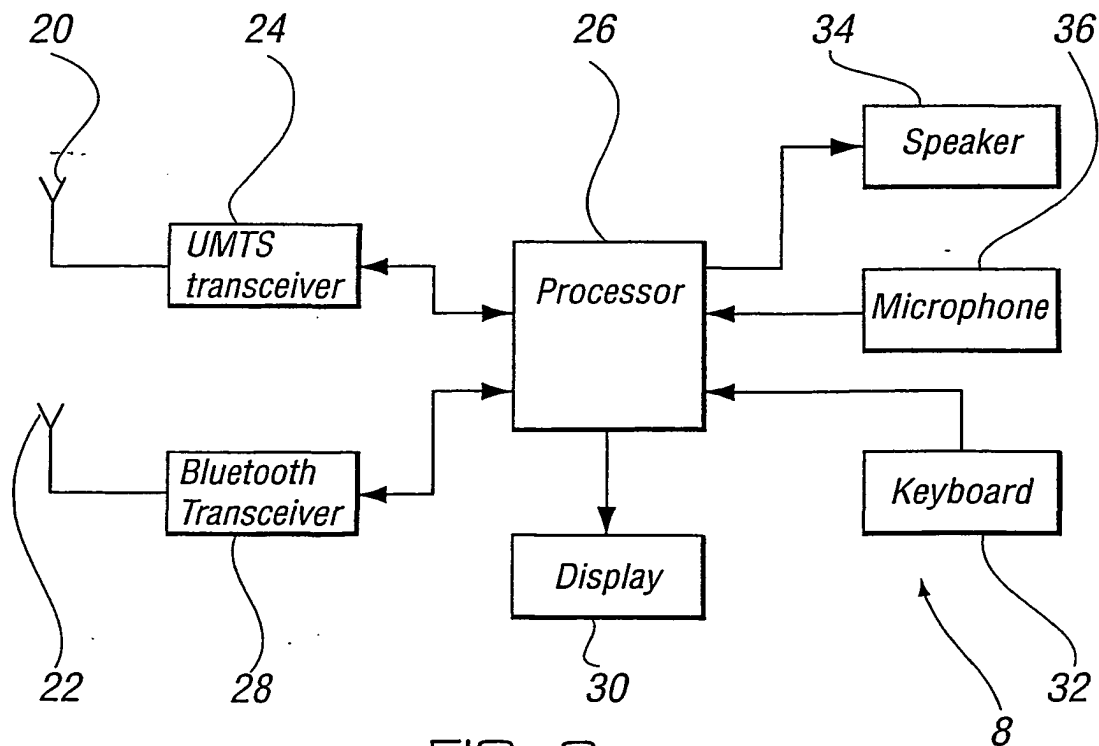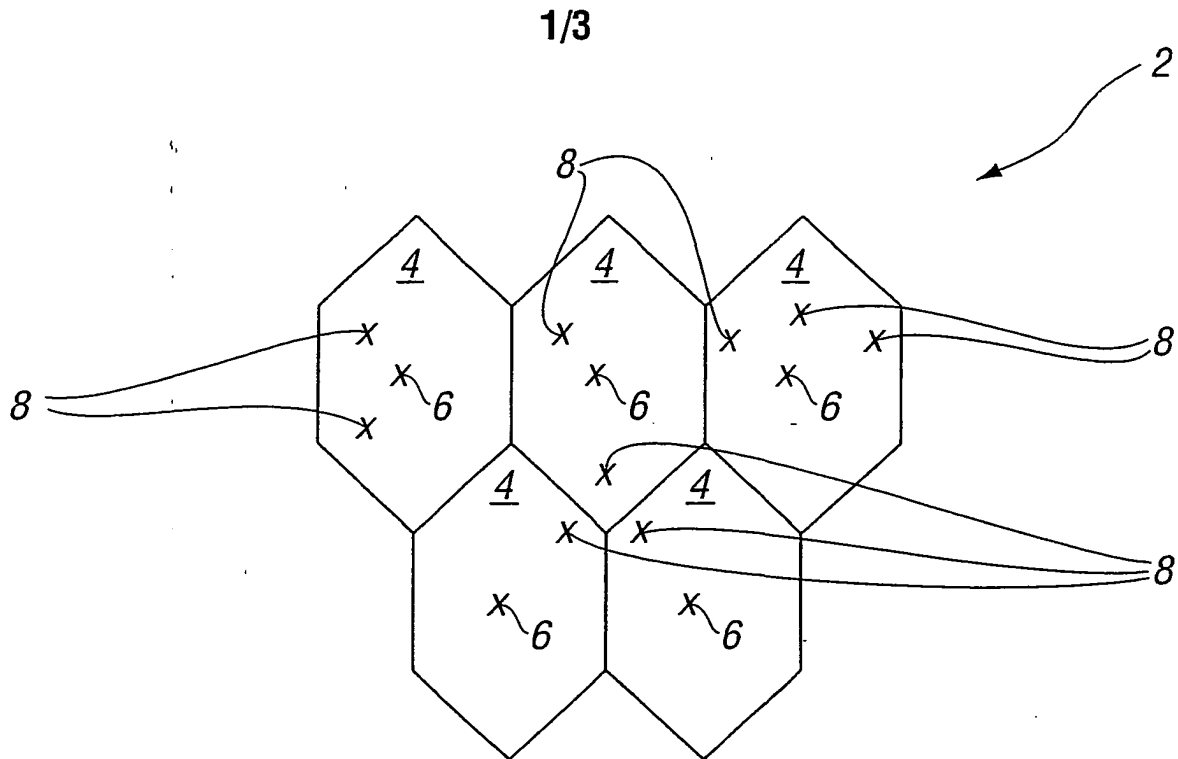

2/3

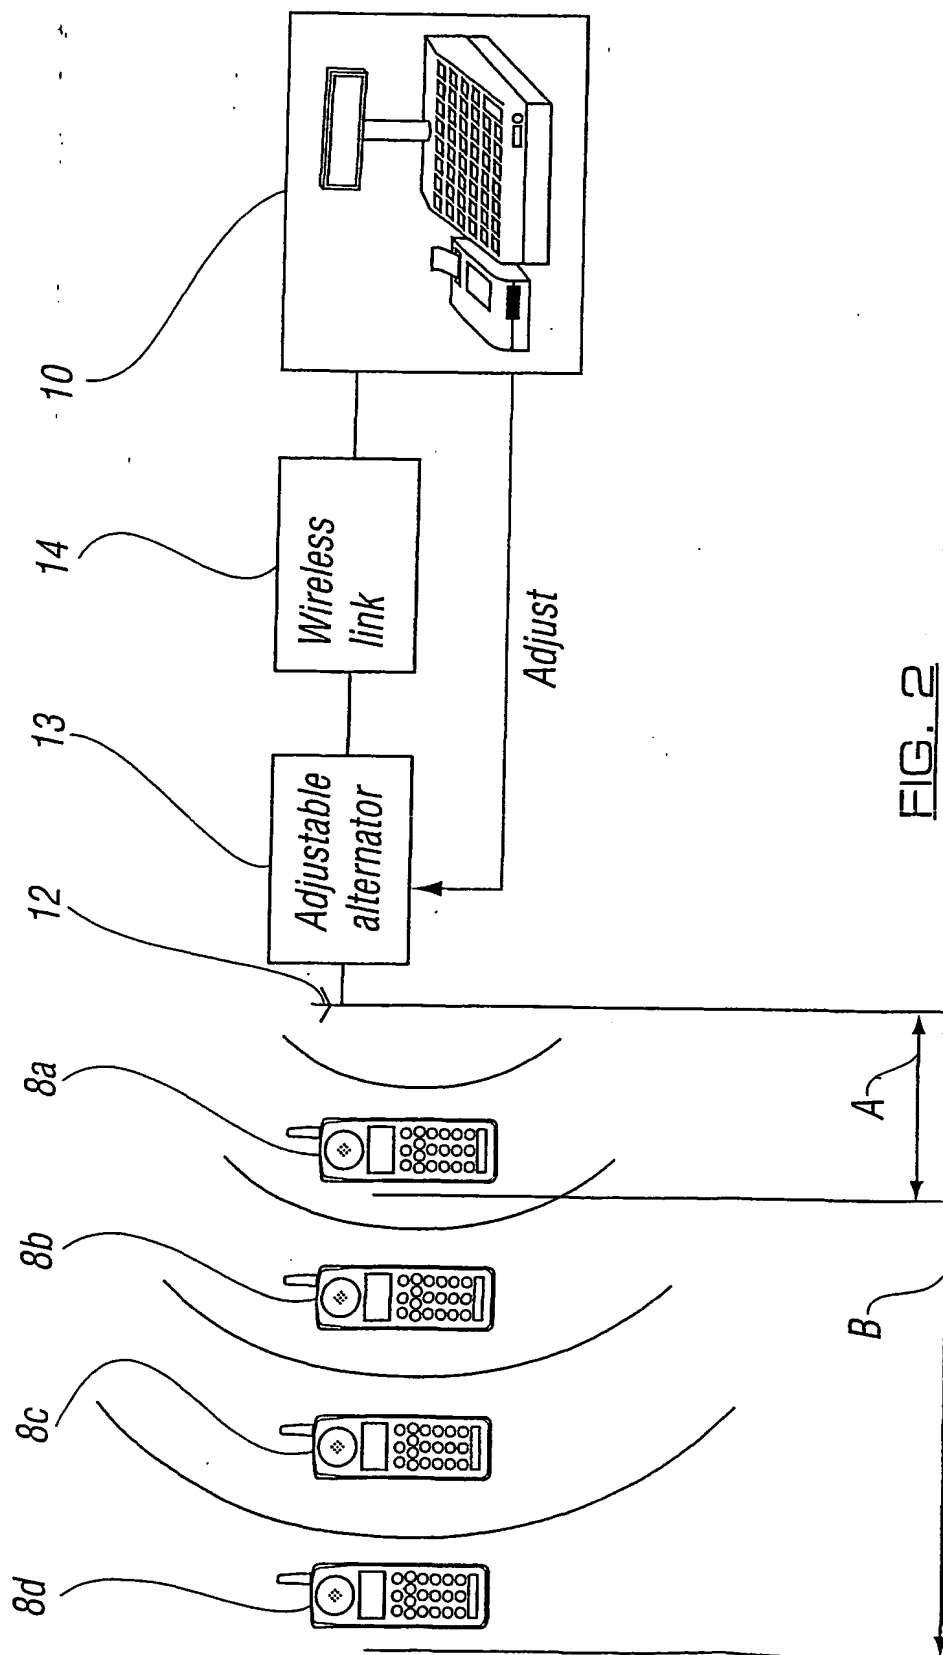


FIG. 2

SUBSTITUTE SHEET (RULE 26)

3/3

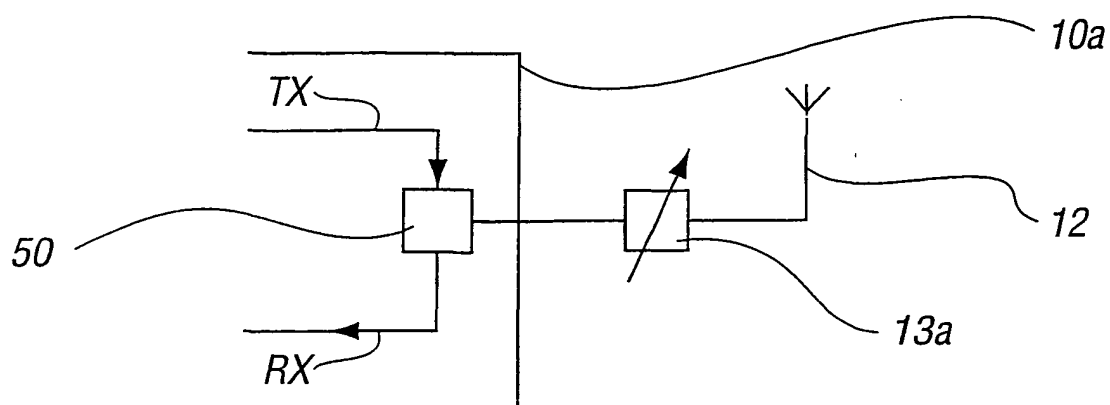


FIG. 4

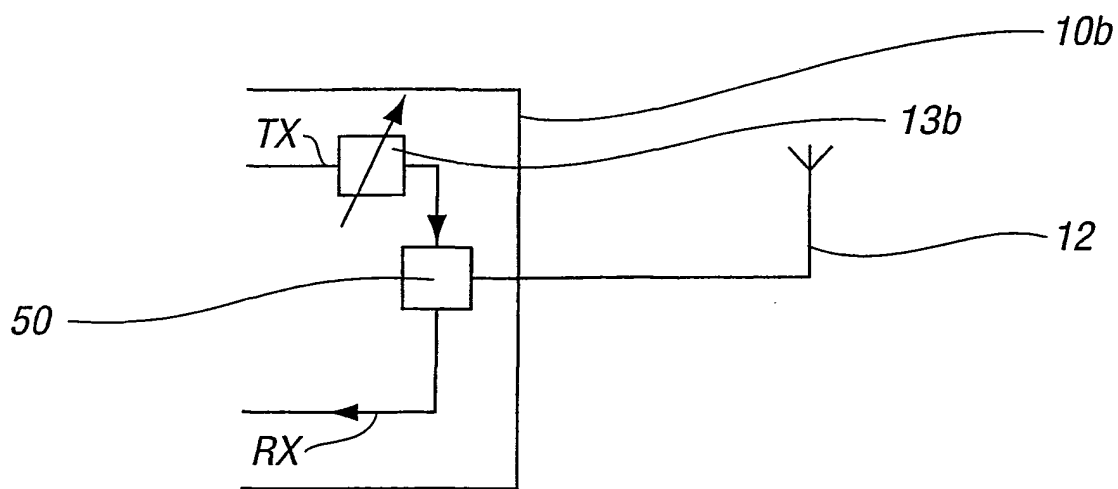


FIG. 5

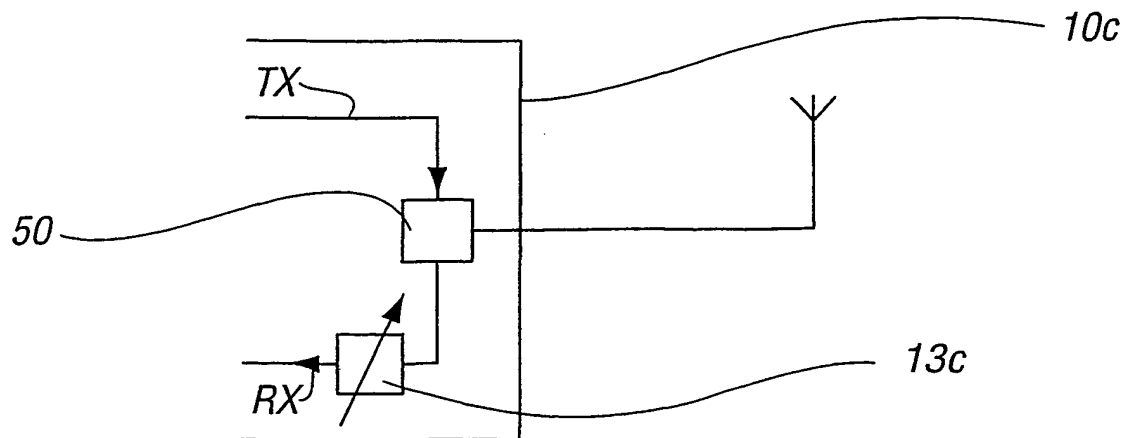


FIG. 6

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
15 November 2001 (15.11.2001)

PCT

(10) International Publication Number  
**WO 01/086880 A3**

(51) International Patent Classification<sup>7</sup>: H04L 12/28,  
12/56, H04B 7/005, H04Q 7/32

(21) International Application Number: PCT/EP01/03950

(22) International Filing Date: 6 April 2001 (06.04.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0010983.5 5 May 2000 (05.05.2000) GB

(71) Applicant (for all designated States except US): NOKIA  
CORPORATION [FI/FI]; Keilalahdentie 4, FIN-02150  
Espoo (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): KANTOLA, Matti  
[FI/FI]; Yliopistokatu 44A30B, FIN-90570 Oulu (FI).  
KARKAS, Kalle [FI/US]; 3863 Ingraham St. E 309,  
San Diego, CA 92109 (US). PIHKIVI, Lauri [FI/FI];

Rantakastellintie 14 D2, FIN-90230 Oulu (FI). HUSS-  
MANN, Holger [DE/DE]; Birkenkamp 55, 4770 Marl  
(DE). NIEMI, Valtteri [FI/FI]; Topeliuksenkatu 32 G11,  
FIN-00290 Helsinki (FI). VAN VALKENBURG, Sander  
[FI/FI]; Kalevalankatu 44 A12, FIN-00180 Helsinki (FI).


(74) Agents: WILLIAMS, David, John et al.; Page White &  
Farrer, 54 Doughty Street, London WC1N 2LS (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM,  
HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK,  
LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX,  
MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL,  
TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian  
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European  
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,  
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,  
CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: COMMUNICATION DEVICES WITH SIGNAL LEVEL CONTROL

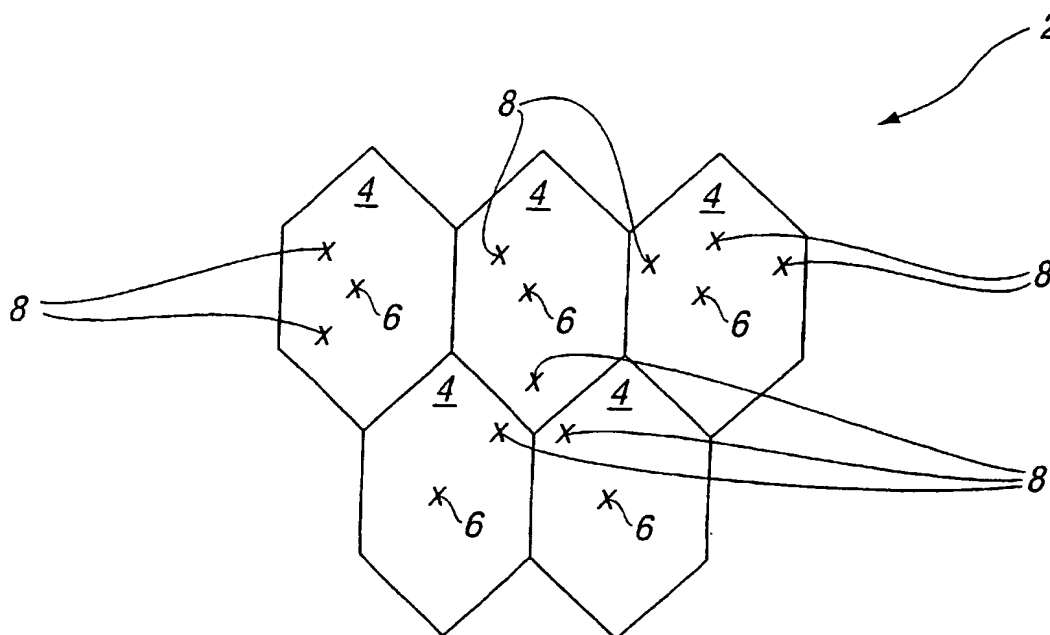

(57) Abstract: A communications device comprising means for transmitting a signal to another party; and means for controlling the signal level with which said transmitting means transmits, wherein said signal level is initially relatively low and when a connection is established with said another party, said signal level is increased.

WO 01/086880 A3

**WO 01/086880 A3**



**Published:**

— *with international search report*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**(88) Date of publication of the international search report:**

**18 July 2002**

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 01/03950

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04L12/28 H04L12/56 H04B7/005 H04Q7/32

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L H04Q H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 93 00750 A (MOTOROLA INC) 7 January 1993 (1993-01-07)	1-4, 6-8, 17, 18, 20, 25, 26
A	page 3, line 14 - page 4, line 4 page 4, line 12 - line 34 page 5, line 22 - page 6, line 27 ---	
X	GB 2 342 010 A (MOTOROLA INC) 29 March 2000 (2000-03-29) page 13, line 25 - page 14, line 15 page 7, line 9 - line 19; figure 8 ---	1-3, 17, 20, 24-26
A	PATENT ABSTRACTS OF JAPAN vol. 1997, no. 10, 31 October 1997 (1997-10-31) & JP 09 172409 A (NEC NIIGATA LTD), 30 June 1997 (1997-06-30) abstract -----	24



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*8\* document member of the same patent family

Date of the actual completion of the international search

2 November 2001

Date of mailing of the international search report

09/11/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

M. García

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 01/03950

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9300750	A	07-01-1993	AU 659349 B2	11-05-1995
			AU 5038993 A	22-09-1994
			BR 9206187 A	14-11-1994
			CA 2102502 A1	26-12-1992
			CN 1068692 A , B	03-02-1993
			EP 0591356 A1	13-04-1994
			FI 935810 A	23-12-1993
			KR 9606140 B1	09-05-1996
			MX 9203111 A1	01-12-1992
			NO 934735 A	21-12-1993
			US 5345596 A	06-09-1994
			WO 9300750 A1	07-01-1993
GB 2342010	A	29-03-2000	US 6148205 A	14-11-2000
JP 09172409	A	30-06-1997	JP 3105779 B2	06-11-2000